

≡ Linear module LM5...NZ...L/R XL with toothed belt drive and lateral support rail left/right


LM	Toothed belt drive				Axial load F [N]	Positioning accuracy [μ/mm]	Repeating accuracy .../1000 mm [mm]	Acceleration a_{max} [m/s ²]
	Type/division	Pinion $d_3 \times l_p$ [mm]	Stroke/rev [mm]	Tension ³⁾ [mm/m]				
LM5...Z...	STD8M	94.22 x 60	296	0.059	... ¹⁾	200/1000 ²⁾	< 0.20 ²⁾	50.0 ¹⁾

$d_3 \times l_p$ = pinion diameter x pinion width

¹⁾ depending on speed and load

²⁾ backlash not factored in

³⁾ belt tension/metre [mm/m] per 100 N tensile force

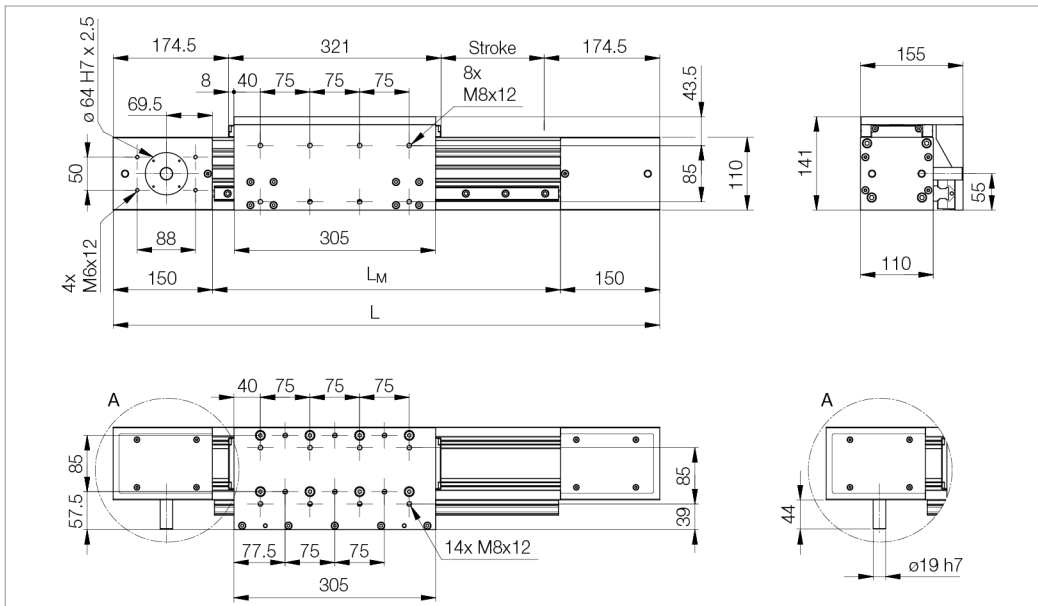

Nominal size	Dimensions			
Designation	L [mm]	L_M [mm]	Belt length [mm]	Weight [kg]
LM5...NZ...L/R	Stroke + 670	L - 300	2 x Stroke + 1144	23.31 kg + 1.79 kg/100 mm Stroke

Variants/dimensions with protective strip (LM5...BZ...L/R) see catalogue

LM	Movement speed		Moments of inertia Z		Stroke max. [mm]	Steel strip	Feed and friction force F_V [N]	Moved mass m_b [kg]
	Guide v_{max} [m/s]	Drive v_{max} [m/s]	I_y [cm ⁴]	I_z [cm ⁴]				
LM5...Z...L/R	5.0	⁴⁾	453.8	625.2	XL: 15280	without with	60.00 70.00	7.590 7.630

⁴⁾ for toothed belt drive, dependent on load and speed and permissible movement speed of the linear guide

Linear modul Type	Maximum permissible load [kN]				Maximum permissible torque [Nm]					
	static		dynamic		static		dynamic			
	$C_{y0,1,2}$	$C_{z0,1,2}$	$C_{y1,2}$	$C_{z1,2}$	M_{x0}	M_{y0}	M_{z0}	M_x	M_y	M_z
LM5...Z...L/R	170.0	170.0	99.2	99.2	3356	12513	12513	2136	10541	10541

The determination of dynamic load ratings and torques is based on a 50,000 m stroke. If comparative values must be calculated for a 100,000 m stroke, the values for M_x , M_y , M_z and C must be divided by the factor 1.26.

With a view to serviceable life, loads of less than 20% of the dynamic load ratings have generally proved to be expedient.