


Bridge module BM4...BR...V/W with ball screw drive and lateral profile left/right

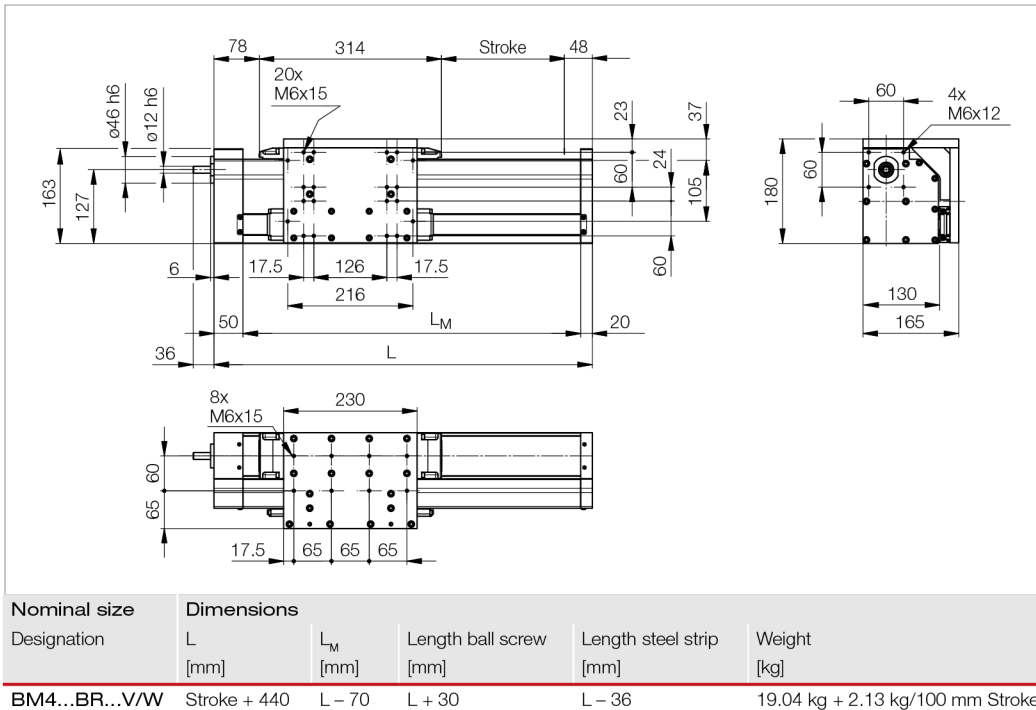

BM Size	BSD d x p [mm]	Axial load rates		Positioning accuracy [μm/mm]	Repeating accuracy [mm]	Accelera- tion a _{max} [m/s ²]	Axial play		Idle torque [Nm]
		C ₀ [N]	C _{dyn} [N]				Type	Axial play [mm]	
BM4...R...	20x20	5705	4912	52/300	< 0.05 ¹⁾	10.0	A	< 0.20	0.200
					< 0.03 ¹⁾		R	< 0.02	
					< 0.01 ¹⁾		V	—	

d x p = screw diameter x thread pitch

¹⁾ backlash not factored in

A = axial play
R = reduced play
V = preloaded

BM Type	Movement speed		Moments of inertia		Stroke max. [mm]	Steel strip	Feed and friction force F _V [N]	Moved mass m _b [kg]
	Guide v _{max} [m/s]	Drive v _{max} [m/s]	I _y [cm ⁴]	I _z [cm ⁴]				
BM4...R...V/W	5.0	2)	1074	834	3000	without	50.00	6.820
						with	70.00	

2) for ball screw drive, dependent on rotational speed characteristics, spindle length and relevant critical rotational speed.

Bridge module Type	Load ratings				Torques					
	Maximum permissible load [kN]		Maximum permissible torque [Nm]		static		dynamic			
	C _{y0,1,2}	C _{z0,1,2}	C _{y1,2}	C _{z1,2}	M _{x0}	M _{y0}	M _{z0}	M _x	M _y	M _z
BM4...R...V/W	119.9	119.9	68.4	68.4	4296	3523	3523	3060	3150	3150

The determination of dynamic load ratings and torques is based on a 50,000 m stroke. If comparative values must be calculated for a 100,000 m stroke, the values for M_x, M_y, M_z and C must be divided by the factor 1.26.

With a view to serviceable life, loads of less than 20% of the dynamic load ratings have generally proved to be expedient.

CAD data

Enquiry (technical/quote)

Download data sheet (PDF)

Download catalogue (PDF)